


## **Gigabit Ethernet Switches**

Enterprise-Class, Web-Configurable and Unmanaged Overview



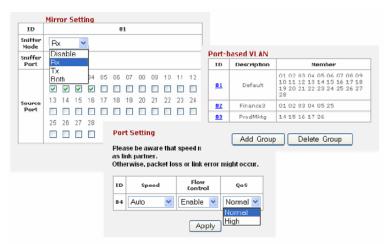

Asante switches (top to bottom): GX5-800P, GX5-2400W, IC35160-T and IC35160-G. Web configuration screens (GX5-2400W)

	IntraCore® - Enterprise-Class	FriendlyNET® GX5-W - Web Configure	FriendlyNET GX5 - Unmanaged
Layer 2/3 Gigabit Switches	16 ports: IC35516-G 16 ports: IC35516-T	-	-
Layer 2 Gigabit Switches	16 ports: IC35160-G 16 ports: IC35160-T	24 ports: GX5-2400W	5 ports: GX5-500 8 ports: GX5-800P, GX5-800
Layer 2 10/100 Switches with Gigabit Uplinks	24 ports + 2 Gig: IntraCore 3524 Series 48 ports + 2 slots: IntraCore 3548-2GT	24 ports + 4 Gig: GX5-424W	-
Management	SNMP, RMON, Telnet, Web, console, port mirroring	Web browser, Windows utility, port mirroring	-
Configuration and Monitoring	Port statistics, configuration	Port statistics, configuration	
Advanced Features	Jumbo frames**, VLANs, IP multicast with IGMP, priority queues, link aggregation	VLANs, link aggregation, 2 priority queues	-
Security	802.1x authentication, new node and duplicate IP address detection, trusted MAC address	System trap (boot-up, illegal login)	-
High Availability	Redundant power supply*, dual flash firmware banks, auto link failover*, spanning tree	-	
Fiber Modules	Industry-standard GBIC or SFP Mini-GBIC modules	SFP Mini-GBIC (GX5-424W)	-

\*All IntraCore models except IC3524 Series. \*\* Except IC3524 Series and IC3548.

© 2006 Asante Networks, Inc. All rights reserved. Asante Networks and FriendlyNET are registered trademarks of Asante Networks, Inc. Auto-Uplink is a trademark of Asante Networks. All other names may be trademarks or registered trademarks of their respective owners. Specifications subject to change without prior notice.